

データベース検索


ヤング率[Mpa] 6.47

単位: N/mm2

せん断弾性率	C10	C01	C11	C20	C30
使用データ	2.156666667	1.69532E+00	#####	#####	#####
参照	1.29668	1.01930E+00	#####	#####	#####
せん断弾性率=純せん断データの2×(C10+C01)					

せん断弾性率[Mpa]	G10	G01	G11	G20	G30
0.4	3.14437E-01	#####	#####	#####	#####
7.0001E-01	5.50265E-01	#####	#####	#####	#####
1.2967E+00	1.01930E+00	#####	#####	#####	#####
2.8200E+00	1.93680E+00	#####	#####	#####	#####
4.2734E+00	2.97110E+00	#####	#####	#####	#####
1.2023E+01	5.19990E+00	#####	#####	#####	#####

硬度(Hs)vsせん断弾性率(kg/cm2)

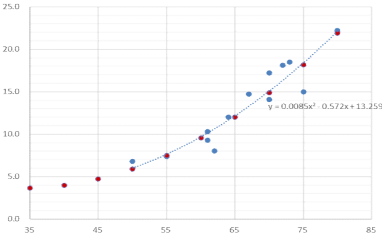

硬度 (Hs)	せん断弾性率 (kg/cm2)
35	0.3626.7
40	0.392.0
45	0.4606.7
50	0.5782.9
55	0.735.5
60	0.931.5
65	1.176.0
70	1.4602.9
75	1.7836.2
80	2.1462.9

グラフタイトル

